


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

| REVISIONS | | | | |
|-----------|--|---------|---------|----------|
| REV | DESCRIPTION | DATE | INITIAL | APPROVED |
| A | CH'D ENGRAVE NOTE P/N -1. | 5/28/09 | RJC | RW |
| 1 | CH'D MTL -1 & -3 FROM 304SS. TO H13 & 4140 Q & T. SHT 2 -1 R.032 TO 035-.040, AD HEAT TREAT TO 48-52, & FINISH. -3 ADDED FINISH | 6/8/11 | JAG | RW |
| 2 | CH'D -1 DELETED Ø.688 COUNTERBORE DEPTH SKIM FLAT PER G.E. | 8/22/11 | RJC | RW |

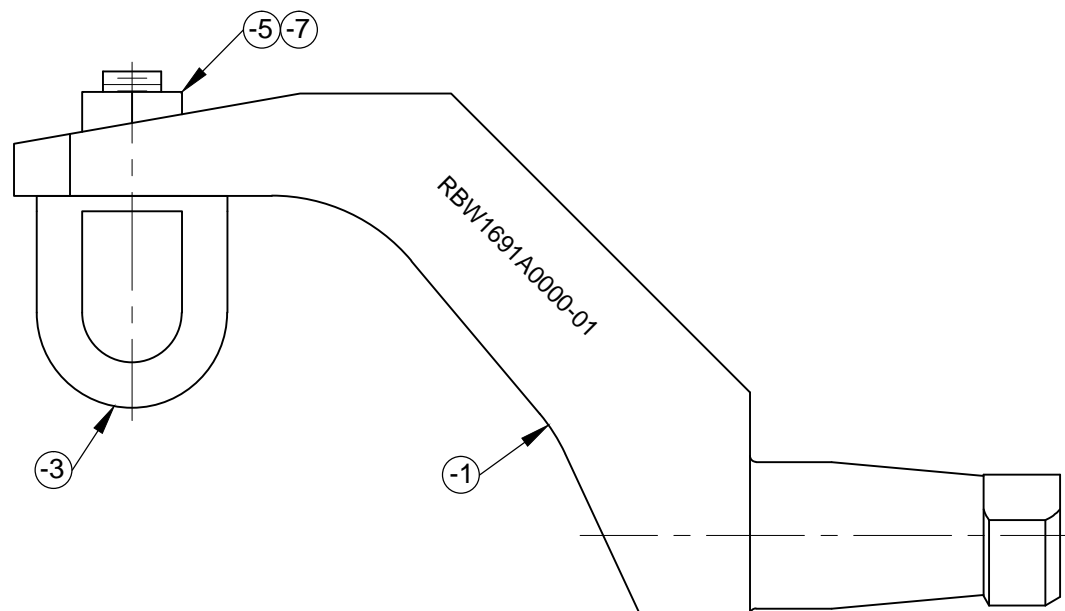

FUNCTION: GIVES THE CORRECT INTERFACE
BETWEEN THE L/G SINGLE AXLE JACK
P/N 02-7861-9100 AND THE MAIN LANDING GEAR.

ORIGINAL No. REF.
RBW1691A0000-01 ASSY. ≡ 7697A0000-01
RBW1691A0000-01-1 ≡ 1691A0000 010/P
RBW1691A0000-01-3 ≡ 1691-0003 HM010(122)
DO NOT USE, FOR REFERENCE ONLY.


| ASSY QTY | ASSY QTY | B/O | PART # | UNIT QTY | DESCRIPTION | MATERIAL | B/O INFORMATION OR SPECIFICATIONS | Pg. |
|----------|----------|-----|--------|----------|-------------|------------|---|-----|
| | | | -1 | 1 | FRAME | H13 | 1-1/4 x 3 x 5-3/4 | 2 |
| | | | -3 | 1 | BALL | 4140 Q & T | Ø1-1/8 x 2 | 3 |
| | | B/O | -5 | 1 | NUT | CAD PLATE | 5/16-24 UNF MS21043-5 | 1 |
| | | B/O | -7 | 1 | WASHER | 18-8 S.S. | Ø.326 I.D., Ø.572 O.D., .036 thick MCMaster-CARR #98017A689 | 1 |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | ASSY # | | | | | | | |

DWG NO. RBW1691A0000-01 REV 2

| | | | |
|---|-------------|------------------------|------|
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES | | DRAWN BY: PERRITT | |
| TOLERANCES ON: DECIMALS .XXX ± .005 FRACTIONS ± 1/32 .XX ± .01 ANGLES ± 5° .X ± .1 | | APPROVED <i>D Weir</i> | |
| | | HEAT TREAT FINISH | |
| | | SPEC | |
| UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING | | USED ON MODEL | |
| | | AGUSTA | |
| SCALE NTS | DATE 2-3-09 | SHEET 1 | of 3 |

This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

| REVISIONS | | | | |
|-----------|--|---------|---------|----------|
| REV | DESCRIPTION | DATE | INITIAL | APPROVED |
| A | CH'D ENGRAVE NOTE P/N -1. | 5/28/09 | RJC | RW |
| 1 | -1 R.032 TO .035-.040, ADD HEAT TREAT TO 48-52, & FINISH. | 6/8/11 | JAG | RW |
| 2 | CH'D -1 DELETED Ø.688 COUNTERBORE DEPTH SKIM FLAT PER G.E. | 8/22/11 | RJC | RW |

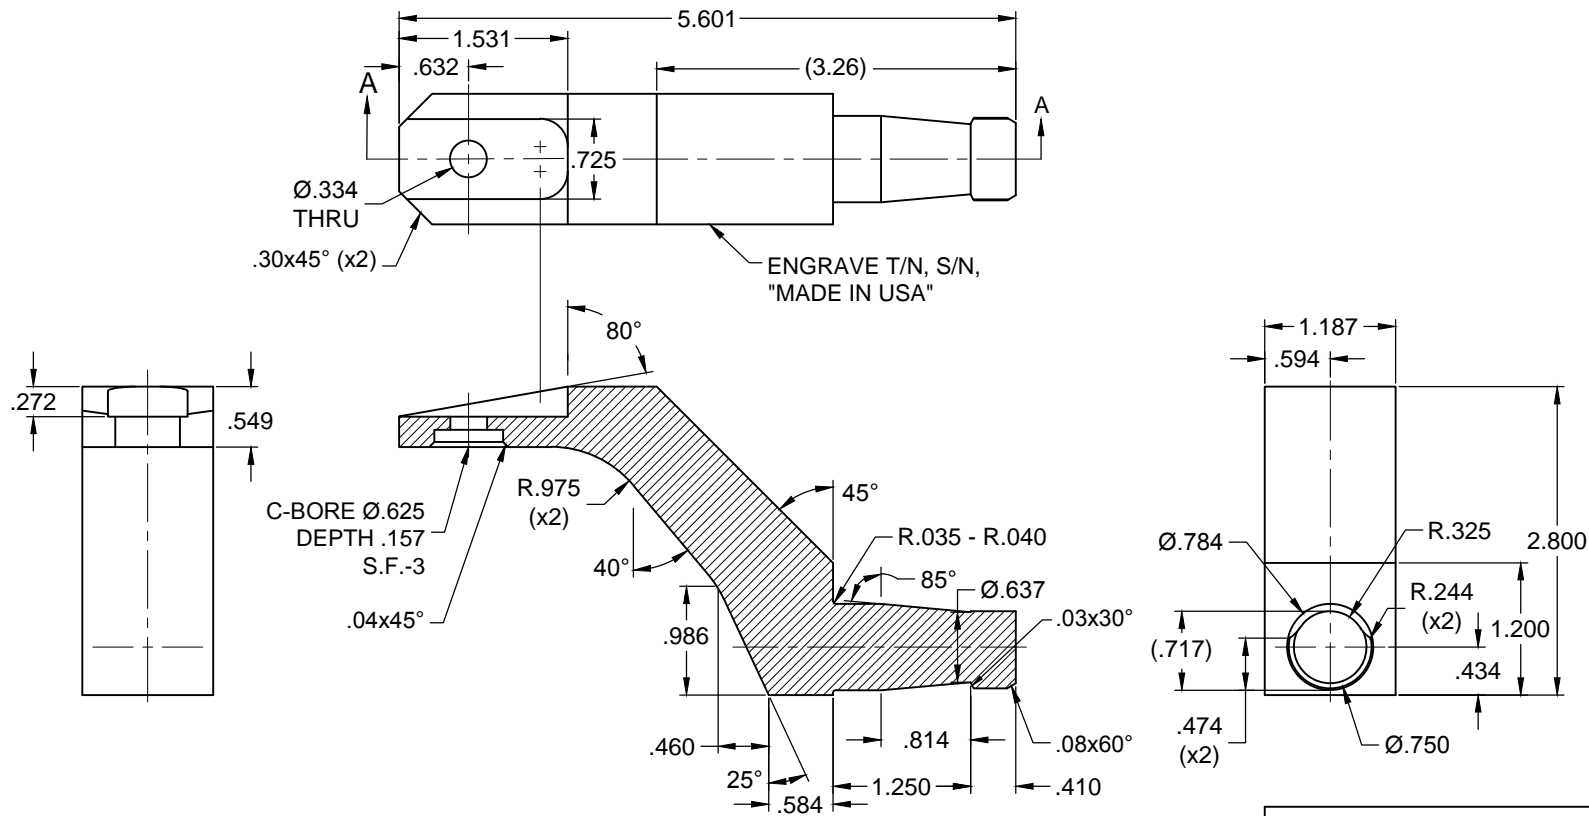


SECTION A-A


①
FRAME

| | |
|---|---|
| RED BARN MACHINE | |
| TITLE MLG JACKING ADAPTER | |
| DWG NO. RBW1691A0000-01-1 | REV 2 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMALS .XXX ± .005 .XX ± .01 .X ± .1 | DRAWN BY: PERRITT APPROVED: <i>D Weil</i> HEAT TREAT: RC 48-52 FINISH: NICKLE PLATE SPEC: MIL-P-6859 USED ON MODEL: AGUSTA |
| UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING | |
| SCALE NTS | DATE 2-3-09 |
| SHEET 2 of 3 | |

| REVISIONS | | | | |
|-----------|---------------------------|---------|---------|----------|
| REV | DESCRIPTION | DATE | INITIAL | APPROVED |
| A | CH'D ENGRAVE NOTE P/N -1. | 5/28/09 | RJC | RW |
| 1 | -3 ADDED FINISH | 6/8/11 | JAG | RW |

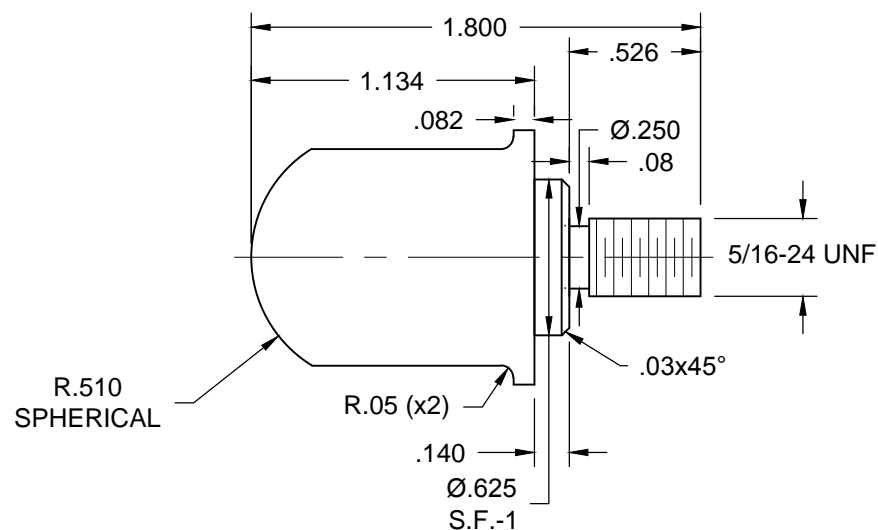

(-3)
BALL

| | | | |
|--|-----------------------|--|-----------------|
|  RED BARN MACHINE | | | |
| TITLE MLG JACKING ADAPTER | | | |
| DWG NO. RBW1691A0000-01-3 | | | REV 2 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMALS .XXX \pm .005 .XX \pm .01 .X \pm .1 FRACTIONS \pm 1/32 ANGLES \pm 5° | | DRAWN BY: PERRITT <i>D Weid</i> | |
| UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .015 x 45° PR .015 R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING | | HEAT TREAT FINISH NICKLE PLATE | |
| | | SPEC MIL-P-6859 | |
| | | USED ON MODEL | |
| | | AGUSTA | |
| SCALE NTS | DATE 2-3-09 | SHEET 3 of 3 | |